GTX 680 FTW Backplate Installation

Step 1

Remove all 13 screws indicated below. Remember to keep all accessories in case your card needs to be returned to EVGA.

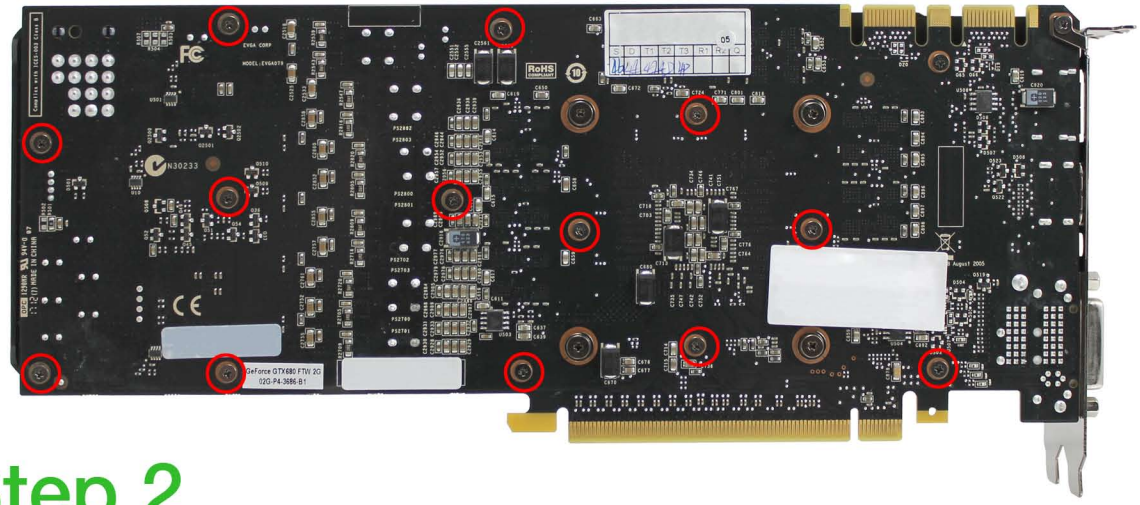

Step 2

Remove the protective cover from the backplate. Place on back of card and align the screw holes.

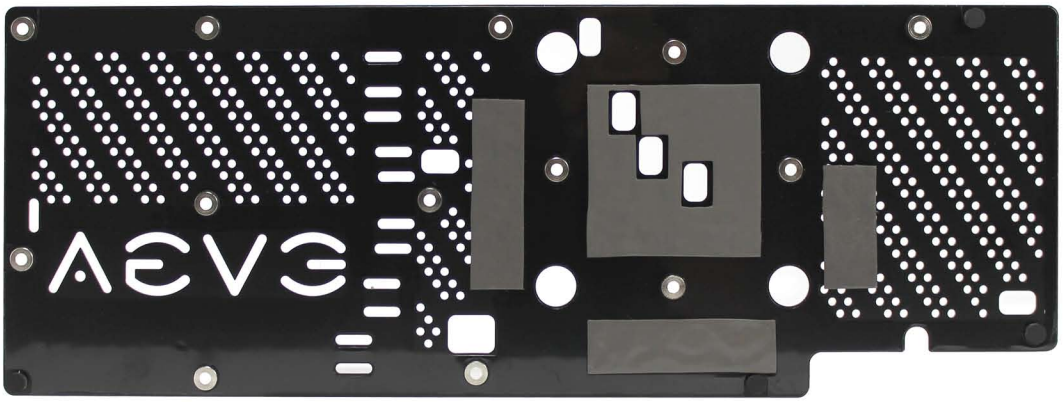

Step 3

Use the 13 provided screws (not the ones you removed) to install the backplate to the PCB. All provided screws use a #0 Phillips head. Once the backplate is firmly attached to the card you are now ready to install your GTX 680 FTW graphics card.